



PB127S WH

ProShield® 10

DuPont™ ProShield® 10 Coverall. Standard Fit Hood. Elastic Wrists and Ankles. Elastic Waist. Serged Seams. White.

Name	Description
Full Part Number	PB127SWHxx0025yy (xx=size;yy=option code)
Fabric/Materials	PROSHIELD® 10
Design	Coverall w/ Hood, Elastic Wrists and Ankles
Seam	Serged
Color	White
Sizes	MD,LG,XL,2X,3X,4X,5X,6X,7X
Quantity/Box	25 per case
Option Codes	00

FEATURES & PRODUCT DETAILS

DuPont™ ProShield® 10, spunbond meltblown spunbond (SMS) garments, are made to the high quality standards you have come to expect from DuPont. ProShield® Basic garments have been optimized for comfort, softness and breathability while enabling you to cut costs for disposable garments

DuPont™ ProShield® Basic disposable garments are designed for workers in a range of industries for nonhazardous dry particle and light liquid splash applications. Garments are available in a variety of styles and colors, including white, blue and gray. Applications include: general maintenance, janitorial/cleaning and other dirty work.


- Attached hood with elastic around face opening
- Elastic opening for tighter fit at wrist
- Elastic opening for tighter fit at ankle

AVAILABLE OPTIONS

Option Code	Description	Sizes	Part Number
00	Standard	MD,LG,XL,2X,3X,4X,5X,6X,7X	PB127SWHxx002500

SPECIFICATIONS

- The garment shall have elastic wrists.
- The zipper shall be covered with a storm flap.
- The garment shall be constructed in the comfort fit design.
- The garment shall have serged seams.
- The garment shall have a respirator fit hood with elastic around the face.
- The garment shall be constructed of DuPont™ ProShield® 10 -- a spun-bonded, meltblown, spun-bonded (SMS) nonwoven.
- The garment shall be a hooded coverall design.
- The garment shall be white in color.
- The garment shall have a front zipper closure.
- The garment shall have elastic ankles.
- The garment shall have an elastic waist.

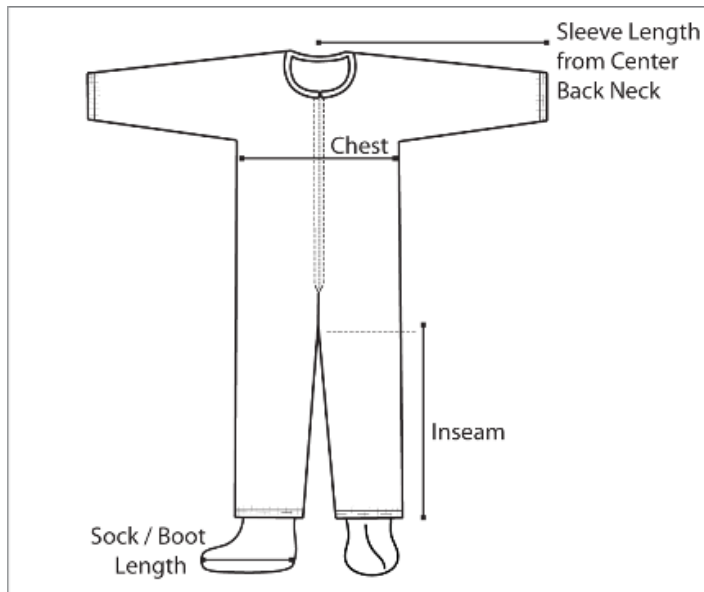

FINISHED DIMENSIONS

Size	Sleeve Length	Chest Width	Inseam	Fits Chest	Fits Height
MD	31 3/4	23 1/2	26	33 3/4 - 37 1/4	5'3" - 5'7"
LG	32 3/4	25 1/4	27	37 1/4 - 40 3/4	5'5" - 5'9"
XL	34 1/2	27	27 3/4	40 3/4 - 44 1/4	5'8" - 6'2"
2X	36 1/4	28 3/4	28 1/4	44 1/4 - 47 3/4	6'0" - 6'4"
3X	37	30 1/2	28 3/4	47 3/4 - 51 1/4	6'2" - 6'4"
4X	38	32 1/4	28 3/4	51 1/4 - 54 3/4	6'4" - 6'7"
5X	40	34	29 1/4	54 3/4 - 58 1/4	6'7" - 6'10"
6X	42 1/4	35	29 3/4	56 3/4 - 60 1/4	6'9" - 7'1"
7X	43 3/4	36 1/2	30 1/4	59 3/4 - 63 1/4	7'0" - 7'4"

ADDITIONAL EQUIPMENT NEEDED

- Wear other appropriate PPE such as, but not limited to, respiratory, eye, head, hand, and foot protection based on the hazard assessment.

Physical Properties



Data relating to mechanical performance of the fabrics used in DuPont chemical protective clothing, listed for the selected garment according to the test methods and relevant European standard, if applicable. Such properties, including abrasion and flex-cracking resistance, tensile strength and puncture resistance can help in the assessment of protective performance.

Property	Test Method	Typical Result
Thickness	ASTM D1117	12 mils
Basis Weight	ASTM D3776	1.3 oz/yd ²
Burst Strength - Mullen	ASTM D3786	31 psi
Tear Resistance - Trap Tear (MD)	ASTM D5587	4 lbf
Tear Resistance - Trap Tear (CD)	ASTM D5587	7 lbf
Breaking Strength - Grab (MD)	ASTM D5034	17 lb _f
Breaking Strength - Grab (CD)	ASTM D5034	14 lb _f
Hydrostatic Head	AATCC 127	25 inches H ₂ O
Surface Resistivity (25°C / 55% RH)	ASTM D257	1 x 10 ⁹ ohms/square
Wearing Apparel Flammability	16 CFR 1610	Class 1

1 According to EN 14325 2 According to EN 14126 3 According to EN 1073-2 4 According to EN 14116 12
 According to EN 11612 5 Front Tyvek ® / Back 6 Based on test according to ASTM D-572 7 See Instructions for
 Use for further information, limitations and warnings > Larger than < Smaller than <= Smaller than or equal to N/A
 Not Applicable STD DEV Standard Deviation

WARNING

- The information provided herein corresponds to our knowledge on the subject at the date of its publication. This information may be subject to revision as new knowledge and experience becomes available. The data provided fall within the normal range of product properties and relate only to the specific material designated; these data may not be valid for such material used in combination with any other materials or additives or in any process, unless expressly indicated otherwise. The data provided should not be used to establish specification limits or used alone as the basis of design; they are not intended to substitute for any testing you may need to conduct to determine for yourself the suitability of a specific material for your particular purposes. Since DuPont cannot anticipate all variations in actual end-use conditions DuPont makes no warranties and assumes no liability in connection with any use of this information. Nothing in this publication is to be considered as a license to operate under or a recommendation to infringe any patent rights.

SPECIAL WARNINGS

- *Serged and bound seams are degraded by some hazardous liquid chemicals, such as strong acids, and should not be worn when these chemicals are present.
- *Liquid barrier performance varies based on the amount of liquid that may get on the garment, the length of time the liquid is on the garment, applied pressure and certain physical properties of the liquid. Tyvek®400, Tyvek® 400 D, ProShield®, ProShield® 10, ProShield® 60, Tyvek® 400 FC, and ProShield® 70 garments are not appropriate if during use they are getting wet (liquid is dripping or running, or it is wet to the touch) or if spotting is observed on skin or garments worn under the protective garment. Tyvek® 500 and Tyvek® 600 offer improved liquid barrier, but may not be appropriate if spotting is observed on the skin or garments worn under the protective garment. In applications where a higher liquid barrier is needed, consider Tychem® 2000 and Tychem® 4000 garments with taped seams.
- *CAUTION: This information is based upon technical data that DuPont believes to be reliable. It is subject to revision as additional knowledge and experience are gained. DuPont makes no guarantee of results and assumes no obligation or liability in connection with this information. It is the user's responsibility to determine the level of toxicity and the proper personal protective equipment needed. The information set forth herein reflects laboratory performance of fabrics, not complete garments, under controlled conditions. It is intended for informational use by persons having technical skill for evaluation under their specific end-use conditions, at their own discretion and risk. Anyone intending to use this information should first verify that the garment selected is suitable for the intended use. In many cases, seams and closures have shorter breakthrough times and higher permeation rates than the fabric. Please contact DuPont for specific data. If fabric becomes torn, abraded or punctured, or if seams or closures fail, or if attached gloves, visors, etc. are damaged, end user should discontinue use of garment to avoid potential exposure to chemical. Since conditions of use are outside our control, we make no warranties, express or implied, including, without limitation, no warranties of merchantability or fitness for a particular use and assume no liability in connection with any use of this information. This information is not intended as a license to operate under or a recommendation to infringe any patent or technical information of DuPont or others covering any material or its use.

Cellosolve® and Selexol™ are registered trademarks of Dow Chemicals Company. Skydrol® is a registered trademark of Solutia.

- Tyvek® 500, Tyvek® 600, Tyvek® 800 products manufactured before January 2023 did contain natural rubber latex which may cause allergic reactions in some sensitized individuals. Anyone who begins to exhibit an allergic response during the use of DuPont products should immediately cease using these products. The incident should also be reported to DuPont at +1 (888) 439-2988 so that an investigation can be initiated.